



Single Motor Standing Desk Installation Manual

UL1-05

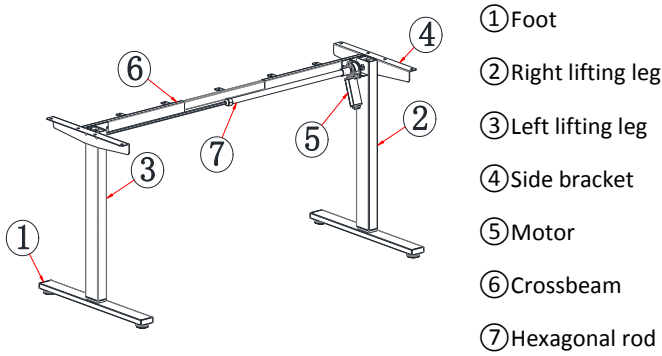


Step 1

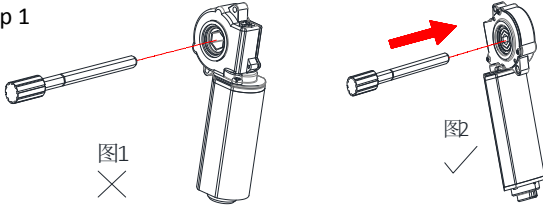


As the picture 2 show: Pass the Hexagonal rod (part 7) through the hexagonal hole of the Motor (part 5).

Step 2

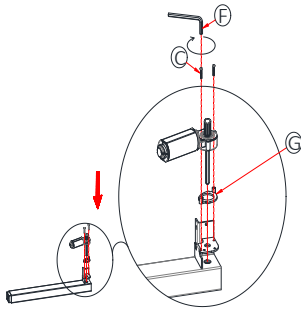


Insert the Hexagonal rod assembled in Step 1 into the hexagonal hole of the Right lifting leg (part 2) through the Motor Gasket (part G), and tighten it with (part C) Screw M5x30.

Step 3

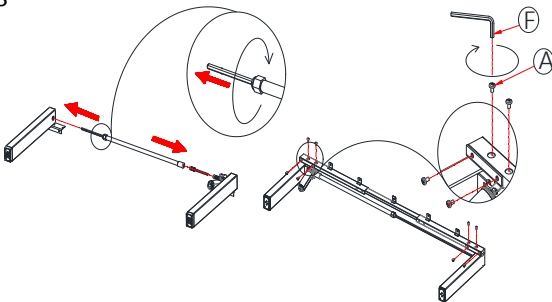

Insert the other side of the Hexagonal rod into the hexagonal hole of the Left lifting leg (part 3) and Right lifting leg (part 2), and attach the Crossbeam (part 6) to the Lifting leg (parts 2 and 3) using (part A) Screw M6x10.


Step 4

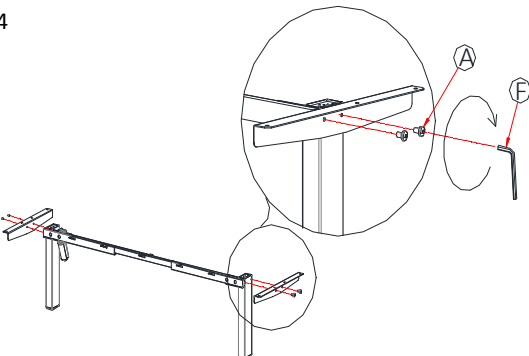

Attach the Side bracket (part 4) to the Crossbeam (part 6) using (part A) Screw M6x10.


Parts Included			Qty
A	Screw M6x10		16
B	Screw M6x16		8
C	Screw M5x30		2
D	Wood screw ST4.8x16		13
E	Wood screw ST4.2x16		2
F	Allen wrench 4mm		1
G	Motor Gasket		1
H	Cable clip		5
I	Power cable		1
J	Handset		1

Step 5

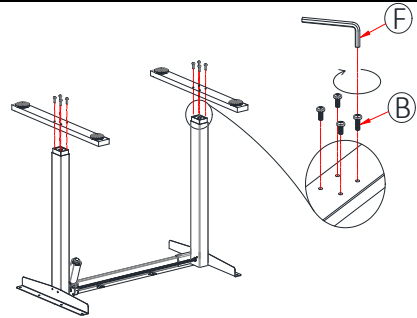


Attach Foot (part 1) to the Lifting leg (parts 2 and 3) using (part B) Screw M6x16.

Step 6

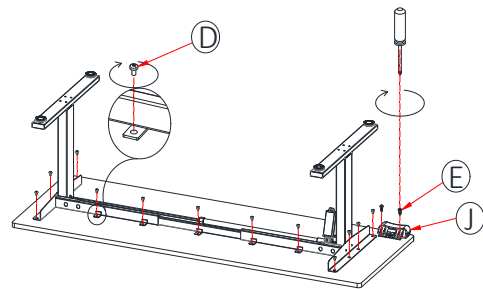


Adjust Crossbeams to the proper position to fit the desktop. Tighten the (part D) Wood screw ST4.8x16 to lock. Attach the Handset (part J) to the underside of the desktop using (part E) Wood screw ST4.2x16.

Step 7

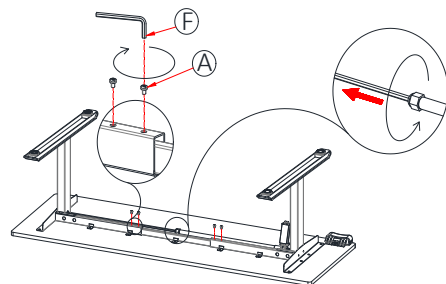

Tighten Crossbeams (part 6) using (part A) Screw M6x10. Adjust the Hexagonal rod (part 7) to the proper position and tighten the plastic

Step 8




Connect the Motor cable (part 5) and Power cable (part I) to the Handset (part J).

Specifications

Input voltage: 100-240VAC, 50/60HZ, Max3A
Output voltage: Max32VDC/Max6A
Motor: 1
Duty cycle: Max.10%
Ambiance temperature: -20℃ — 50℃
Noise: ≤ 50 dB

Instructions For Use

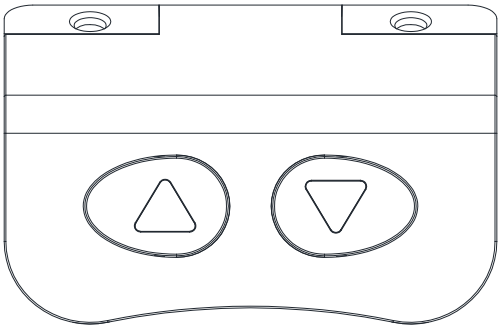

IMPORTANT: You must reset the lifting column prior to use.

Reset Procedure:

1. Press and hold the DOWN button on the handset until the column reaches its lowest height.
2. Release the DOWN button.
3. Press and hold the DOWN button for about 5 seconds until the desk slightly rises 5mm, and stops.
4. Release the DOWN button. The desk will be ready to use.

Adjust desk height:

Press UP or DOWN button to adjust the lifting height.

NOTE

Do not attempt to open the housing of the following components
Contact with electrical voltage may cause serious injury and death by electrocution
Do not pull on the power cord to unplug the plug from the power outlet
If any issues, please contact your sales rep.